

**GENERAL MEETING OF THE BOARD OF DIRECTORS
OF THE
CENTRAL TEXAS REGIONAL MOBILITY AUTHORITY**

RESOLUTION NO. 23-013

**APPROVE A CONTRACT WITH NORTEX CONCRETE LIFT AND STABILIZATION, INC.
FOR CONCRETE SLAB LIFTING AND STABILIZATION ON THE MANOR EXPRESSWAY
(290 TOLL)**

WHEREAS, the Mobility Authority performs regular inspections of its toll facilities to ensure their safety and quality are appropriately maintained for the traveling public; and

WHEREAS, in the course of these inspections the Mobility Authority has observed a degraded ride quality on the Manor Expressway (290 Toll) between US 183 and SH 130; and

WHEREAS, based on these inspections, the Mobility Authority's general engineering consultant recommends the Mobility Authority continue to monitor and address ride quality issues identified along the 290E corridor; and

WHEREAS, Nortex Concrete Stabilization, Inc. participates in the Texas Multiple Award Schedule ("TXMAS") Program administered by the State Comptroller's Office as part of Texas SmartBuy Membership Program (formerly known as the "State of Texas CO-OP Purchasing Program"); and

WHEREAS, in accordance with Article 15 of the Mobility Authority Policy Code, purchases made through a cooperative program such as the Texas SmartBuy Membership Program are deemed to have satisfied Mobility Authority procurement requirements; and


WHEREAS, in order to address the ride quality issues on the Manor Expressway (290 Toll), the Executive Director has negotiated a contract with Nortex Concrete Lift and Stabilization, Inc. which is attached hereto as Exhibit A; and

WHEREAS, the Executive Director recommends entering into the contract for concrete slab lifting and stabilization services with Nortex Concrete Lift and Stabilization, Inc. through the TXMAS Program in an amount not to exceed \$268,571.00.

NOW THEREFORE BE IT RESOLVED that the Board of Directors hereby approves the contract for slab lifting and stabilization services to address the degraded ride quality issues identified on the Manor Expressway (290 Toll) which is attached hereto as Exhibit A, and authorizes the Executive Director to enter into the contract with Nortex Concrete Stabilization, Inc. in an amount not to exceed \$268,571.00 through the TXMAS Program.


Adopted by the Board of Directors of the Central Texas Regional Mobility Authority on the 26th day of April 2023.

Submitted and reviewed by:



James M. Bass
Executive Director

Approved:



Robert W. Jenkins, Jr.
Chairman, Board of Directors

Exhibit A



201 NW 26th St.
Fort Worth, TX 76164
(817) 831-1240 office
(817) 831-1245 fax

Central Texas Regional Mobility Authority
3300 N. IH 35, Suite 300
Austin, TX 78705

Attn: John Jones

Subject: Central Texas Regional Mobility Authority with use of contract number TXMAS-22-74501 for concrete pavement lifting and stabilization with polyurethane foam injections.

Date: April 19, 2023

This is an Agreement between Nortex Concrete Lift & Stabilization, Inc., and the Central Texas Regional Mobility Authority, for concrete pavement lifting and stabilization services with polyurethane foam injections to properly repair dips, heaves, and bridge approach slabs on the 290 Toll main lanes from US 183 to SH 130 at specific locations described in the documentation.

Enclosed you will find the following documents:

1. Scope of work to be performed at specified locations including 2 year warranty
2. Award Letter from Texas Comptroller of Public Accounts for Contract TXMAS-22-74501
3. TXMAS-22-74501 price list for all associated services under the contract
4. Quote with price list for repairs on expressway main lanes under contract TXMAS-22-74501
5. Incidental price list for lane closure fees, message boards, and off duty officers
6. TXDOT special spec 3025 for "raising and undersealing concrete slabs with foam systems"
7. Nortex Material spec sheet which complies with all requirements of TXDOT ss3025
8. Nortex Concrete Lift Certificates of Insurance
9. Form 1295

Compensation to be paid based on actual pounds of polyurethane foam material pumped at each location as specified in the contract documents. Once approved and executed, the purchase order for polyurethane injections repairs must be issued in the Texas SmartBuy online purchasing portal to receive the specified contract pricing.


Nortex requests the Executive Director's signature to execute this agreement in the signature area below.


4/19/23
 Signature _____ Date _____

Casey DeRosa
General Manager
Nortex Concrete Lift & Stabilization, Inc.

 Signature _____ Date _____

James M. Bass
Executive Director
Central Texas Regional Mobility Authority

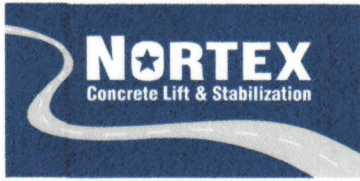

201 NW 26th St.
Fort Worth, TX 76164
(817) 831-1240 office
(817) 831-1245 fax

RAISING & UNDERSEALING CONCRETE PAVEMENT SCOPE OF WORK AND QUALITY CONTROL PLAN

Nortex Concrete Lift & Stabilization, Inc. is committed to maintaining an effective Quality Control Plan that reinforces our commitment to deliver a consistent high-quality product and service to our customers.

This plan addresses the following:

- Equipment**
- Work Site Preparations**
- Construction Methods**
- Monitoring Procedures**
- Clean Up Procedures**
- Spill Clean Up Procedures**
- Material Information**
- Warranty Information**

Equipment: A listing of lifting and undersealing equipment, this list is a minimum and shall not preclude the use of additional equipment.

- A. Pneumatic drills and electric drills capable of drilling 5/8-inch diameter holes.
- B. Truck mounted pumping units (Gusmer H20/35 Hydraulic Proportioner Pumps) capable of injecting high-density polyurethane foam between the concrete pavement and the sub-base, and capable of controlling the rate of rise of the pavement.

C. Hilti Self Leveling Laser Level unit and lifting gages to ensure that pavement is lifted to an even plane.

Work Site Preparations: Shall be specified per contract documents and/or general accepted practices and procedures.

- A. The contractor shall review a profile of the pavement and footing provided by the owner to determine where the slab and footing need to be raised or void filled.

Construction Methods:

- A. **Drilling:** A series of 5/8" holes shall be drilled at four to six foot intervals through the concrete pavement. The contractor will determine the exact location and spacing of holes based on site conditions and scope of work.
- B. **Injecting:** The injector on the discharge guns shall make a tight seal in the injection hole. The polyurethane foam is two-component mixtures that meet at the discharge gun and is injected beneath the concrete pavement with approximately 1000 psi. The polyurethane foam initially remains in liquid form for approximately 15 – 20 seconds, which allows the material to move laterally beneath the concrete filling all voids in the area. The polyurethane foam then begins to set up and expand into its solid form exerting the necessary lifting force.

Monitoring Procedures:

- A. **Controlling rise:** The amount of rise shall be controlled using the pumping unit, by regulating the rate of injection of material. Lifting gages and Laser shall be used to monitor the rise and ensure pavement is lifted to an even plane. Mix Ratio's on Gages must be monitored periodically to ensure proper mixture of material being pumped along with monitoring of heat to keep foam somewhere in the vicinity of 80 to 140 degrees Fahrenheit (depending on outside air temperature).
- B. Drain inlets, asphalt shoulders, MSE walls, etc...will be monitored frequently to ensure material below ground has not traveled to an area it is not intended to go.
- C. Supervisor shall be on site during entire operation and be fully trained in mechanical operation of equipment. Supervisor shall be responsible for safety of his crew at all times and responsible for monitoring lifting procedures.

Clean Up Procedures:

- A. All excess polyurethane material will be removed from the job site.
- B. All injections holes will be re-drilled to a depth of 2-3" and then non shrink cementitious grout will be poured into the open hole and struck flush with pavement surface.
- C. Entire work area will be cleaned and cleared to properly restore the operation lane.

Spill Clean Up Procedures:

- A. Entire area of spill to be covered and dispersed evenly with absorbent material kept on hand.
- B. After setting phase absorbent material is cleaned up and disposed of in thick trash bags and tied off for proper disposal.
- C. Process can be repeated until spill is sufficiently cleaned.

Material Information:

- A. All material used is certified for compliance with all state, and local authorities pertaining to the contract documents or special provisions. TXDOT ss3025 is provided along with NCFI Polyurethanes 24-003 material technical data sheet.

Warranty Information:

- A. All locations repaired under this contract stand by an industry standard two-year warranty that if a slab settles more than ½" in that period then it will be repaired free of charge. Traffic control and other incidental services would not be covered under the warranty.

**GLENN HEGAR** TEXAS COMPTROLLER OF PUBLIC ACCOUNTS**NOTICE OF AWARD**

Nortex Concrete Lift & Stabilization, Inc.
Attn: Casey DeRosa
201 NW 26th St.
Fort Worth, TX 76164-7110

Re: Contract No. & Description: TXMAS-22-74501 Road and Highway Building
Materials, Asphaltic
Term of Contract: Date of Deputy Comptroller's signature on this Notice of
Award through December 20, 2022

The Comptroller of Public Accounts (CPA) accepts the TXMAS Offer Packet of Nortex Concrete Lift & Stabilization, Inc. (Contractor) and hereby awards Contractor a TXMAS contract (Contract). Contractor's awarded services will be processed through our Statewide Contract Management office (SCM) and will be available for purchase on the Texas SmartBuy online ordering system.

The Contract consists of the documents stated in Section 2 Contract Documents of the TXMAS Terms and Conditions CPA Addendum 1. The attached final catalog consists of services and pricing submitted and agreed upon by CPA and Contractor. The final catalog may exclude any services that CPA has decided not to award. Any excluded services are not permitted to be sold under the Contract and may not be added at any time during the life of the Contract.

To the extent there are conflicts between the Base Contract (between Oklahoma Office of Management & Enterprise Services (OMES) and Contractor, dated 11/18/2021) and the TXMAS Terms and Conditions, the TXMAS Terms and Conditions control, including the following stipulations:


1. TXMAS Terms and Conditions Section 20 Force Majeure controls over the Base Contract Terms and Conditions 23 Force Majeure.
2. TXMAS Terms and Conditions Section 28 Indemnification controls over the Base Contract Terms and Conditions 16. Indemnification.
3. TXMAS Terms and Conditions Section 40 Limitation of Liability controls over the Base Contract Terms and Conditions 16.5 Limitation of Liability.
4. TXMAS Terms and Conditions Section 43 Severability controls over the Base Contract Terms and Conditions 26.10 Severability.

Contractor may advertise the awarded Contract to Texas state agencies and Texas SmartBuy Member entities. Prior to mass advertising, a draft must be submitted to the TXMAS program for approval. Please complete the attached ECSM Submission Checklist and submit it with the draft advertisement to: txmas@cpa.texas.gov

Contractor shall be responsible for the fulfillment of any Purchase Order issued through Texas SmartBuy pursuant to the terms and conditions of the Contract. Contractor shall not ship any products or provide services until receipt of a Purchase Order issued through Texas SmartBuy.

CPA does not guarantee a specific volume to be purchased throughout the term of the Contract. No minimum compensation to the Contractor is guaranteed.

Texas Comptroller of Public Accounts

DocuSigned by:

Lisa Craven

Deputy Comptroller

Date: 5/26/2022 | 9:02 AM CDT




Contract: TXMAS-22-74501
 Description: Road and Highway Building Materials
 Contract Dates: 05/26/2022 to 12/20/2023
 Renewal Options: (2) remaining one-year terms



Contractor:
 Nortex Concrete Lift & Stabilization, Inc.
 201 NW 26th St.
 Fort Worth, TX 76164
 VID: 12002919921

TXMAS-22-74501 – Slab Jacking Price List

Item Number	Description/Measurement	Unit	Price per Unit
	Concrete Pavement Lifting and Stabilization		
1000003294	Polyurethane Injections (200 LBS - 1,000 LBS)	LB	\$4.81
1000002795	Polyurethane Injections (1,001LBS – 5,000 LBS)	LB	\$4.60
1000003269	Polyurethane Injections (5,001 LBS – 10,000 LBS)	LB	\$4.45
1000003346	Polyurethane Injections (10,001 LBS and above)	LB	\$4.30
41114603	Dynamic Cone Penetrometer Testing	Each	\$456.00
	Value Added Section		
VA-1	Concrete Joint Grinding (0 – 1,000 Linear Feet)	LF	\$6.09
VA-2	Concrete Joint Grinding (1,001 & above Linear Feet)	LF	\$4.06
VA-3	Cleaning & Resealing with Joint Sealant	LF	\$25.38
VA-4	Soil Densification (Polyurethane Injections at Depths from 3.0 FT – 10.0 FT)	LB	\$5.06
VA-5	Soil Densification (Polyurethane Injections at Depths 10.1 FT and Above)	LB	\$5.47

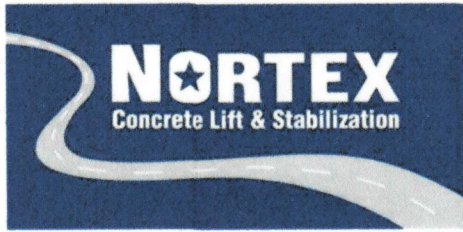

NORTEX CONCRETE LIFT & STABILIZATION
 201 NW 26th ST
 FORT WORTH, TX 76164
 (817) 831-1240 OFFICE
 (817) 831-1245 FAX

REMIT PAYMENT TO:
 P.O. BOX 4935
 FORT WORTH, TX 76164

QUOTE

TO: Central Texas Regional Mobility Authority (CTRMA)
 3300 N. IH-35, Suite 300
 Austin, TX 78705

ATTN: John Jones
 Senior Maintenance Coordinator

RE: TXMAS-22-74501 Polyurethane Injection Repairs

DATE: April 14, 2023

#	EB/WB SH-290 TOLL	Std. Injection QUANTITY (LBS)	Deep Injection QUANTITY (LBS)
#1	NB 183 to 290 E @ 516.50 - Direct Connect Approach, 50'x36' w/ 2.75" lift	2600	
#2	EB SH-290 @ 588.70 - Large Heave, 120'x70' w/ 3" lift		12000
#3	EB SH-290 @ 589.34 - Springdale overpass Departure, 75'x56' w/ 2" lift		3500
#4	EB SH-290 @ 589.48 - Arterial A off ramp, 50'x18' w/ 2" lift	1800	
#5	EB SH-290 @ 589.92 - Arterial A overpass Approach, 55'x70' w/ 2.25" lift	4000	
#6	EB SH-290 @ 591.95 - Giles on ramp at toll station, Large Heave+Dip, 120'x18' w/ 3.25" lift	3600	
#7	EB SH-290 @ 592.18 - Decker Ln overpass Approach, 55'x70' w/ 3" lift		4500
#8	WB SH-290 @ 593.21 - SH-130 overpass Departure, 55'x70' w/ 1.75" lift		3200
#9	WB SH-290 @ 589.48 - Little Walnut Creek Depature, 55'x70' w/ 3" lift		4500
#10	WB SH-290 @ 589.35 - Springdale overpass Approach, 75'x70' w/ 1.75" lift	2750	1000
#11	WB SH-290 @ 589.30 - Springdale overpass Departure, 75'x70' w/ 1.75" lift	2750	1000
TOTALS:		17500	29700

ITEM	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	EXTENSION
1000003346	POLYURETHANE INJECTIONS (10,000 + LBS)	LB	17500	\$4.30	\$75,250.00
ITEM	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	EXTENSION
VA-4	DEEP INJECTIONS WITH HIGH DENSITY POLYURETHANE	LB	29700	\$5.06	\$150,282.00


TAX: EXEMPT

TOTAL:	\$225,532.00
---------------	---------------------

All pricing from Texas Smartbuy Contract TXMAS-22-74501.
 You will only be charged for LBS pumped.

JACOB MCDONALD
 PROJECT MANAGER
 jacob.mcdonald@nortexconcretelift.com
 817-899-7467

www.nortexconcretelift.com

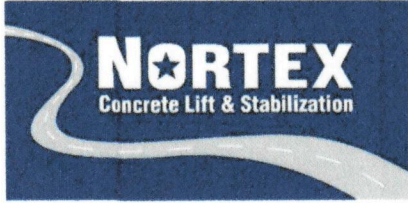

201 NW 26th St.
 Fort Worth, TX 76164
 (817) 831-1240 office
 (817) 831-1245 fax

**TXMAS-22-74501 concrete pavement lifting and stabilization
 with polyurethane injections and value added services**

Price Sheet Per Location for Traffic Control

Item Number	Description/Measurement	Unit	Price per Unit	Quantity	Total
Incidental	Message Board	Night	\$50	20	\$1,000
Incidental	Message Board Delivery/Pickup	Each	\$75	8	\$600
Incidental	Off Duty Officer/s	Hour	\$68	108	\$7,344
Location #1	NB 183 to EB 290E DC -dip before app. @ 516.50				
Incidental	Included w/ location #2	Night	n/a	n/a	\$0
Location #2	EB Hwy 290 -large heave @ 588.70				
Incidental	2 DC ramp closures + 2 LLC	Night Night	\$2,200 \$3,055	2 1	\$7455
Location #3	EB Hwy 290 at Springdale Departure @ 589.34				
Incidental	1 RLC w/ ramp closed + 2 LLC	Night Night	\$2,200 \$3,055	2	\$6,110
Location #4	EB Hwy 290 -Arterial A off ramp @ 589.48				
Incidental	Included w/ location #3	Night	n/a	n/a	\$0
Location #5	EB Hwy 290 -Arterial A Departure @ 589.92				
Incidental	Included w/ location #3	Night	n/a	n/a	\$0
Location #6	EB Hwy 290 -Giles On-Ramp @ 591.95				
Incidental	Included w/ location #7	Night	n/a	n/a	\$0

Location #7	EB Hwy 290 -Decker Ln Approach @ 592.18				
Incidental	1 RLC w/ swap to 2 LLC 2 LLC	Night Night	\$2,200 \$3,055	2	\$6,110
Location #8	WB Hwy 290 -SH-130 Departure @ 593.21				
Incidental	2 LLC w/ swap to 1 RLC 1 RLC	Night Night	\$3,055 \$2,200	1 1	\$5,255
Location #9	WB Hwy 290 -Little Walnut Crk Dep. @ 589.48				
Incidental	1 RLC w/ ramp closed + 2 LLC	Night Night	\$2,200 \$3,055	3	\$9,165
Location #10	WB Hwy 290 -Springdale Approach @ 589.35				
Incidental	Included w/ location #9	Night	n/a	n/a	\$0
Location #11	WB Hwy 290 -Springdale Departure @ 589.30				
Incidental	Included w/ location #9	Night	n/a	n/a	\$0
Total Purchase Price =					\$43,039.00

Special Specification 3025

Raising and Undersealing Concrete Slabs with Foam Systems



1. DESCRIPTION

Raise and underseal concrete slabs at locations shown on the plans and as directed.

2. MATERIAL

Furnish a closed cell hydro-insensitive, high-density polyurethane foam system with a minimum free rise density of 3.0 lb./cu. ft., with a minimum compressive strength of 50 psi. Use epoxy material meeting the requirements of DMS-6100, "Epoxies and Adhesives," Type III, Class C.

3. EQUIPMENT

Provide machinery, tools, and equipment necessary for proper execution of the work. At a minimum, provide the following:

- 3.1. **Drill.** Use a drill capable of drilling holes of the required diameter and depth.
- 3.2. **Pump.** Furnish a pump unit with the appropriate attachments capable of injecting the polyurethane:
- Under the concrete slab at the depth(s) required in the plans.
 - At a controlled flow rate with a digital reading of the cumulative pounds used.
- 3.3. **Level.** Provide control equipment to indicate when the final grade has been achieved and to monitor slab movement.

4. CONSTRUCTION

- 4.1. **Preparation.** Prepare a profile of each area to determine the extent of the concrete slab that requires adjustment or raising. Ensure that the finished concrete slabs will conform to the grades and cross-section of the slabs as shown in the plans or as directed. Determine the exact locations of the injection holes for each treated area. Obtain approval for the injection hole locations.
- 4.2. **Drilling.** Use drilling operations that do not damage the surrounding concrete. Drill injection holes with diameters less than or equal to 3/4 in. through the concrete as proposed or as directed. When an injection point is through a terminal anchor slab and sleeper slab, provide a tube to insure the polyurethane material does not migrate between the two slabs.
- 4.3. **Injection.** Inject high-density polyurethane formulation directly under the slab. Do not extend the nozzle end below the bottom of the concrete. Cease injection when directed, no improvement is observed, or material extrudes from locations other than slab penetrations. Take precautions to prevent the intrusion of injected material into any drainage facility and other structures. Remove any excessive polyurethane material after the nozzle is removed from the hole. Seal the hole with an approved method and material.
- 4.4. **Grade Control.** Control the final elevations within 1/4 in. of the proposed profile elevations. The Engineer may check the treated area to confirm that the pavement has been aligned properly to facilitate drainage.

- 4.5. **Repairs.** As directed, repair any pavement slab or bridge approach/departure slab that has cracked or did not achieve required grades as a result of the Contractor's operation at no additional cost to the Department.

Fill injection holes with epoxy or approved concrete patching materials.

5. SET TIME

Formulate the high-density polyurethane to set and obtain 90% of its compressive strength within 15 min. after injection. Attain the manufacturer's recommended compressive strength unless otherwise shown on the plans.

6. MEASUREMENT

This Item will be measured by the pound of high-density polyurethane injected and accepted.

7. PAYMENT

The work performed and materials furnished in accordance with this Item and measured as provided under "Measurement" will be paid for at the unit price bid for "Raising and Undersealing Concrete Slab." This price is full compensation for furnishing and injecting polyurethane material, concrete repairs, labor, materials, tools, and incidentals.

TERRATHANE™ Polyurethanes

TerraThane™ Polyurethanes by NCFI are uniquely formulated for a variety of geotechnical applications. Each batch goes through stringent testing and quality assurance standards to ensure reliability in the field.

About 24-003

TerraThane™ 24-003 is a hydrophobic/hydro-insensitive, MDI-based polymer formula that is specially designed for exceptional flow or spread under concrete structures when water is present. The 24-003 flowability ensures voidfill and support before lifting. 24-003 is available with an NSF/ANSI 61 Section 5 – 2017 certification.

24-003 APPLICATIONS

- Bridge Approaches and Departures
- Highway and Streets
- Airport Runways and Taxiways
- Concrete Slab Lifting
- Joint Matching
- Void Filling
- Deep Soil Injection

Reaction Curve at 110°

Cream Time	7 seconds
Gel Time	13 Seconds
Tack Free Time	19 seconds




Physical Properties

Physical Properties	Test Method	Free Rise	Restrained
Density	ASTM D1622	4.0 pcf	5-6 pcf
Compressive Strength	ASTM D1621	68 psi	80-100 psi
Compressive Modulus	ASTM D1621	1900 psi	2400-3200 psi
Tensile Strength	ASTM D1623	79 psi	100-120 psi
Tensile Modulus	ASTM D1623	1446 psi	3100 psi
Water Absorption	ASTM D2842	≤ 0.04 lbs/ft ²	≤ 0.04 lbs/ft ²
Closed Cell Content		>92%	>92%
Max Service Temp		200°F	200°F
Elongation	ASTM D1623	5.1%	
Shear Strength	ASTM C273	52.0 psi	90 psi
Shear Modulus	ASTM C273	602 psi	677 psi
Flexural Strength	ASTM D790	80 psi	387 psi
Flexural Modulus	ASTM D790	1625 psi	13502 psi

TerraThane Geotechnical Division • NCFI Polyurethanes

Div. of Barnhardt Manufacturing Co. • P.O. Box 1528 • Mounty Airy, NC 27030 • 800-346-8229

WWW.TERRATHANE.COM

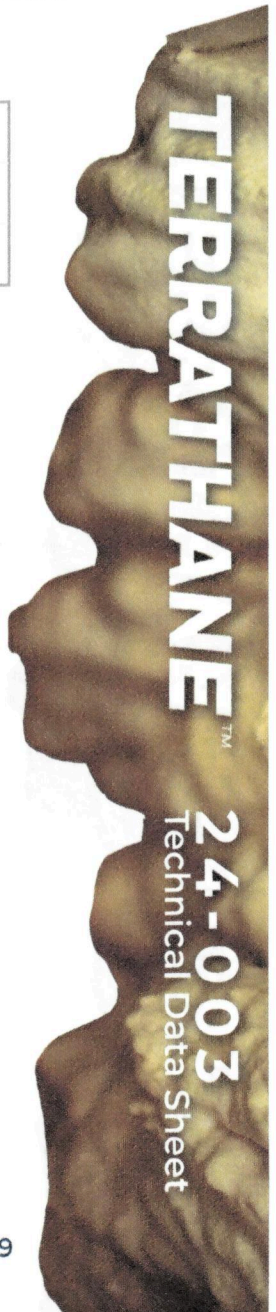



NTXCOMM01C

LMENDOZA

CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)

4/17/2023

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER INSURICA TX Insurance Services, Inc. 700 Highlander Boulevard, Suite 340 Arlington, TX 76015	CONTACT NAME: Liliana Mendoza		
	PHONE (A/C, No, Ext): (817) 471-1814	FAX (A/C, No):	
	E-MAIL ADDRESS: Liliana.Mendoza@INSURICA.com		
INSURED NORTEX Concrete Lift and Stabilization, Inc. 201 NW 26th St. Fort Worth, TX 76164	INSURER(S) AFFORDING COVERAGE		NAIC #
	INSURER A : Knight Specialty Insurance Company		15366
	INSURER B : Merchants National Insurance Company		12775
	INSURER C : Texas Mutual Insurance Company		22945
	INSURER D : Certain Underwriters at Lloyd's, London		NA
	INSURER E : Ohio Casualty Insurance Company		24074
INSURER F :			

COVERAGES **CERTIFICATE NUMBER:** **REVISION NUMBER:**

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSD	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
A	<input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY <input type="checkbox"/> CLAIMS-MADE <input checked="" type="checkbox"/> OCCUR GEN'L AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input checked="" type="checkbox"/> PROJECT <input type="checkbox"/> LOC OTHER:			OMKS00159-00	11/9/2022	11/9/2023	EACH OCCURRENCE \$ 1,000,000 DAMAGE TO RENTED PREMISES (Ea occurrence) \$ 100,000 MED EXP (Any one person) \$ 10,000 PERSONAL & ADV INJURY \$ 1,000,000 GENERAL AGGREGATE \$ 2,000,000 PRODUCTS - COM/PO AGG \$ 2,000,000 \$
	AUTOMOBILE LIABILITY <input type="checkbox"/> ANY AUTO OWNED AUTOS ONLY <input type="checkbox"/> SCHEDULED AUTOS <input type="checkbox"/> HIRED AUTOS ONLY <input type="checkbox"/> NON-OWNED AUTOS ONLY						COMBINED SINGLE LIMIT (Ea accident) \$ BODILY INJURY (Per person) \$ BODILY INJURY (Per accident) \$ PROPERTY DAMAGE (Per accident) \$ \$
B	<input type="checkbox"/> UMBRELLA LIAB <input checked="" type="checkbox"/> OCCUR <input checked="" type="checkbox"/> EXCESS LIAB <input type="checkbox"/> CLAIMS-MADE DED RETENTION \$			EXL0003316	11/9/2022	11/9/2023	EACH OCCURRENCE \$ 5,000,000 AGGREGATE \$ 5,000,000 \$
C	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) If yes, describe under DESCRIPTION OF OPERATIONS below <input checked="" type="checkbox"/> Y N/A			0002041319	12/9/2022	12/9/2023	<input checked="" type="checkbox"/> PER STATUTE <input type="checkbox"/> OTH-ER E.L. EACH ACCIDENT \$ 1,000,000 E.L. DISEASE - EA EMPLOYEE \$ 1,000,000 E.L. DISEASE - POLICY LIMIT \$ 1,000,000
D	Poll-Agg Limit \$2MM			CSIEL00162-00	11/9/2022	11/9/2023	Each Claim: \$1,000,000
E	Inland Marine			BMO65543060	11/21/2022	11/21/2023	Leased/Rented \$100,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)
Central Texas Regional Mobility Authority (CTRMA), TxDOT and other parties are additional insured on a Primary/Non-Contributory basis for General Liability policy.
Waiver of Subrogation in favor of: Central Texas Regional Mobility Authority (CTRMA), TxDOT and other parties for the General Liability and Workers Compensation.

CERTIFICATE HOLDER CTRMA Central Texas Regional Mobility Authority 3300 N IH-35, Suite Austin, TX 78705	CANCELLATION SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS. AUTHORIZED REPRESENTATIVE
--	--



CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)
04/17/2023

PRODUCER
HALEY CARTER STATE FARM
328 W MAIN ST., STE 1
AZLE, TX 76020

THIS CERTIFICATE IS ISSUED AS MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW.



INSURED
NORTEX CONCRETE LIFT & STABILIZATION, INC.
201 NW 26TH ST
FORT WORTH, TX 76164

INSURERS AFFORDING COVERAGE

NAIC #

INSURER A: State Farm Mutual Auto Insurance Company 25178
INSURER B:
INSURER C:
INSURER D:
INSURER E:

COVERAGES

THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. AGGREGATE LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	ADD'L INSRD	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFECTIVE DATE (MM/DD/YY)	POLICY EXPIRATION DATE (MM/DD/YY)	LIMITS	
		GENERAL LIABILITY <input type="checkbox"/> COMMERCIAL GENERAL LIABILITY <input type="checkbox"/> CLAIMS MADE <input type="checkbox"/> OCCUR GEN'L AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC				EACH OCCURRENCE	\$
						DAMAGE TO RENTED PREMISES (Ea occurrence)	\$
						MED EXP (Any one person)	\$
						PERSONAL & ADV INJURY	\$
						GENERAL AGGREGATE	\$
						PRODUCTS - COM/POP AGG	\$
A	X	AUTOMOBILE LIABILITY <input type="checkbox"/> ANY AUTO <input type="checkbox"/> ALL OWNED AUTOS <input checked="" type="checkbox"/> SCHEDULED AUTOS <input checked="" type="checkbox"/> HIRED AUTOS <input checked="" type="checkbox"/> NON-OWNED AUTOS	96 0737-A01-43	07/01/23	07/01/24	COMBINED SINGLE LIMIT (Ea accident)	\$ 1,000,000
						BODILY INJURY (Per person)	\$
						BODILY INJURY (Per accident)	\$
						PROPERTY DAMAGE (Per accident)	\$
		GARAGE LIABILITY <input type="checkbox"/> ANY AUTO				AUTO ONLY - EA ACCIDENT	\$
						OTHER THAN EA ACC	\$
						AUTO ONLY: AGG	\$
		EXCESS/UMBRELLA LIABILITY <input type="checkbox"/> OCCUR <input type="checkbox"/> CLAIMS MADE DEDUCTIBLE RETENTION \$				EACH OCCURRENCE	\$
						AGGREGATE	\$
							\$
							\$
		WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? If yes, describe under SPECIAL PROVISIONS below				WC STATUTORY LIMITS	OTH-ER
						E.L. EACH ACCIDENT	\$
						E.L. DISEASE - EA EMPLOYEE	\$
						E.L. DISEASE - POLICY LIMIT	\$
		OTHER					

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES / EXCLUSIONS ADDED BY ENDORSEMENT / SPECIAL PROVISIONS
CTRMA and TXDOT are listed as additional insured's with waiver of subrogation

CERTIFICATE HOLDER

CTRMA
Central Texas Regional Mobility Authority
3300N IH-35, Suite 300
Austin, TX 78705

CANCELLATION

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, THE ISSUING INSURER WILL ENDEAVOR TO MAIL 30 DAYS WRITTEN NOTICE TO THE CERTIFICATE HOLDER NAMED TO THE LEFT, BUT FAILURE TO DO SO SHALL IMPOSE NO OBLIGATION OR LIABILITY OF ANY KIND UPON THE INSURER, ITS AGENTS OR REPRESENTATIVES.

AUTHORIZED REPRESENTATIVE
JUDY BUTLER, SSA

CERTIFICATE OF INTERESTED PARTIES

FORM 1295

1 of 1

Complete Nos. 1 - 4 and 6 if there are interested parties.
 Complete Nos. 1, 2, 3, 5, and 6 if there are no interested parties.

OFFICE USE ONLY CERTIFICATION OF FILING

Certificate Number:
 2023-1009496

Date Filed:
 04/19/2023

Date Acknowledged:

1 Name of business entity filing form, and the city, state and country of the business entity's place of business.

Nortex Concrete Lift & Stabilization, Inc.
 Fort Worth, TX United States

2 Name of governmental entity or state agency that is a party to the contract for which the form is being filed.

Central Texas Regional Mobility Authority

3 Provide the identification number used by the governmental entity or state agency to track or identify the contract, and provide a description of the services, goods, or other property to be provided under the contract.

CTRMA 2023 Nortex 3
 Roadway Repairs - Polyurethane Injections with Soil Densification

4	Name of Interested Party	City, State, Country (place of business)	Nature of interest (check applicable)	
			Controlling	Intermediary

5 Check only if there is NO Interested Party.


6 UNSWORN DECLARATION

My name is Casey DeBose, and my date of birth is 12/26/83.

My address is 201 NW 26TH St., Fort Worth, TX, 76164, USA.
(street) (city) (state) (zip code) (country)

I declare under penalty of perjury that the foregoing is true and correct.

Executed in Tarrant County, State of Texas, on the 19 day of April, 2023.
(month) (year)

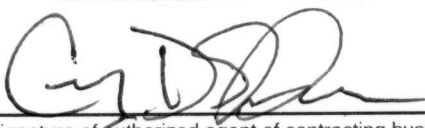

 Signature of authorized agent of contracting business entity
 (Declarant)